


Wind direction indicator

*Wind direction indicator
for heliport*

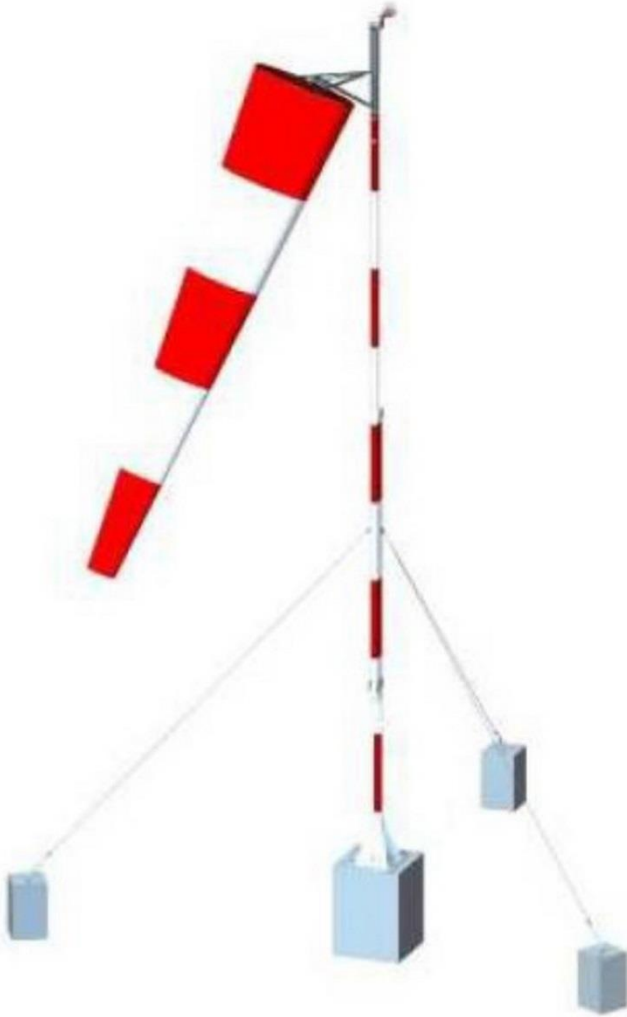

Wind direction indicator WDI-R


The WDI-R mast meets the ICAO Standards. It can be pull down, measures 7.40 meters, and it is delivered with its 3 wires (except for reinforced version), its pull down system and its fixing.

There are two diameters of windsocks, 60 and 100mm.

In option, mast can be made in stainless steel, or be equipped of a frangible system.

Several accessories are available, such as lighting windsock or obstruction lighting of the mast.



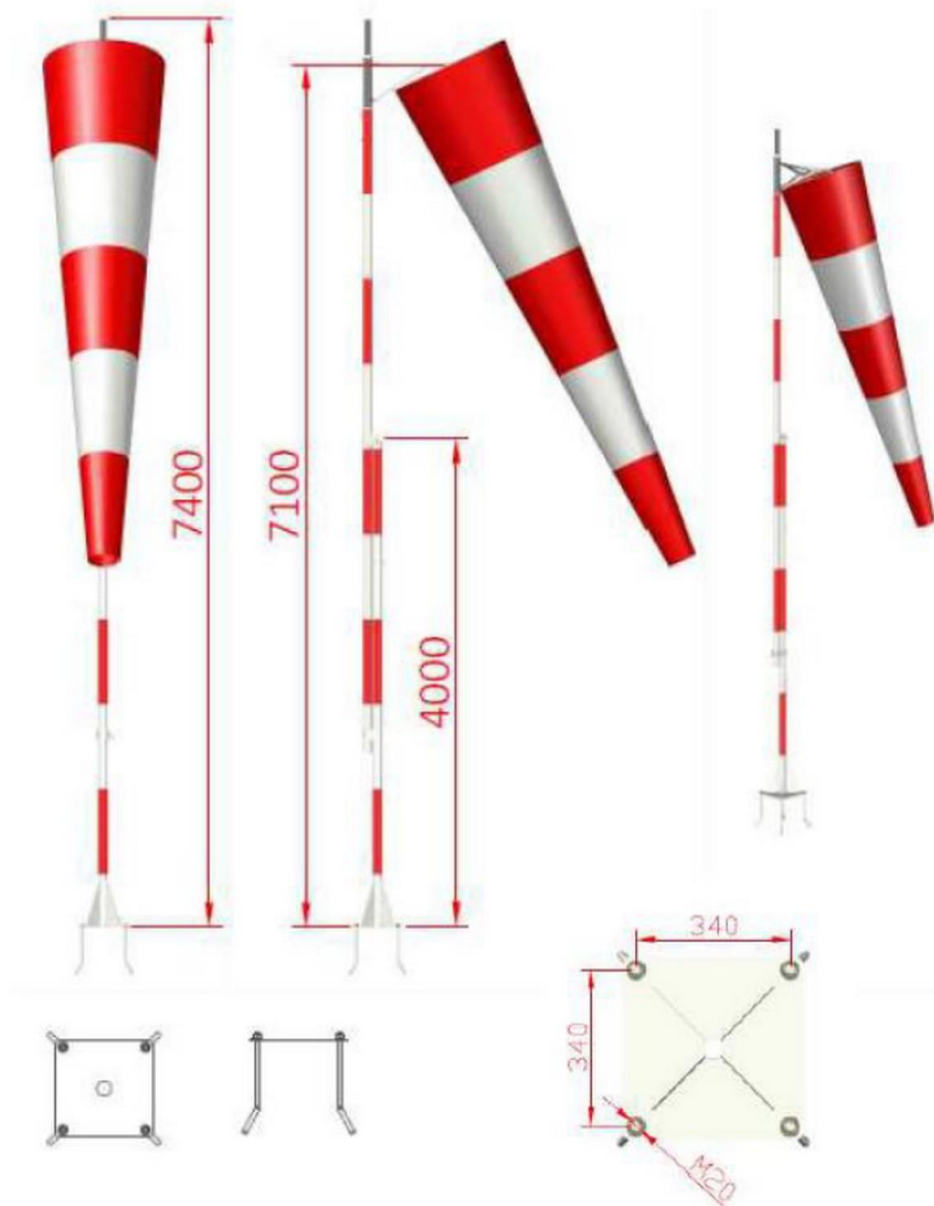

Technical features:

Height	7,40 metres
Pull down	Yes
Protection	Galvanised steel
Colours	Red and white (mast and windsock)
Fixing	Sealing plate (included)
Windsock	Yes
Diameters	60 (heliport) and 100 (airport)
Wires	3 x 120cm (except reinforced version)
Concrete base	600 x 600 x 800
Humidity	100%
Frost	-60°C
Wind speed	160 km/h
Legislations	CE EN60947-1 CEI60364, NF C15-100 2014 / 35 / UE ICAO Annex 14, Volume I, Chapter 6